

产品特征

Product Features

- 采用有源PFC电路方案, 高功率因数, 低总谐波
Adopt active PFC circuit scheme, high factor and low harmonic
- 全隔离安全驱动
Full-isolation driver
- 防火环保PC塑料外壳
Fireproof environmental protection PC plastic cover
- 短路、过流和过压保护。
Short circuit, over current and over voltage protection.
- 全球多国认证可选 (ETL, TUV, SAA, CB, CE)
Global multi-national certification optional (ETL, TUV, SAA, CB, CE)
- 符合世界照明安全规范标准
Conform to the world lighting safety standards
- 5年质保
5 years quality warranty



电气规格

Electrical specifications






输入 Input	电压范围 Voltage range	90-130&180-240V/AC				
	频率范围 Frequency range	50-60Hz				
	功率因数 Power factor	>0.95				
	满载效率 Full load efficiency	≥85%				
	交流电流 AC current	0.3A/0.15A				
输出 Output	输出模式 Rated current	恒流模式 Constant Current			恒压模式 Constant Voltage	
	额定电流 Rated current	700mA	900mA	1200mA	2000mA	1250mA
	电流精度 Current accuracy	±5%	±5%	±5%	±10%	±10%
	输出电压范围 Output voltage range	30-42V	23-33V	18-25V	12V	24V
	额定功率 Rated power	30W				
保护 protect	短路保护 Short circuit protection	间歇重启模式, 异常排除后可自动恢复 Intermittent restart mode, after the exception can be automatically restored				
	过流保护 Overcurrent protection	打嗝模式, 过流异常排除后可自动恢复 Hiccup mode, after the removal of abnormal flow can be automatically restored				
	过压保护 Overvoltage protection	打嗝模式, 过压异常排除后可自动恢复 Hiccup mode, after the exception of abnormal pressure can be automatically restored				

环境 Environment	工作温度、湿度 Operating Temperature/humidity	-30-45℃,5-95%RH
	储存温度、湿度 Storage Temperature/humidity	-40-70℃,5-95%RH
	温度系数 Temperature coefficient	±0.03%/℃(0-50℃)
	耐振动 Vibration	5-55Hz/2g, 30 Minutes
安规和EMC Safety	安全规范 Safety	EN60598
	耐压 Pressure	I/P-O/P:3KVAC IP-FG:1.88KVAC O/P-FG:0.5KVAC
	绝缘阻抗 Insulation resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25℃/70%RH
	电磁兼容发射 EMC Emission	EN55022, EN55015 Class B
	电磁兼容抗扰性 EMC Immunity	EN61547, ENV5024, EN61000-4-2/3/4/6/8/11
其它 Other	净重 Net weight	145g
	尺寸 Size	79*31mm

外壳结构


Shell structure

单位：毫米
Units: mm

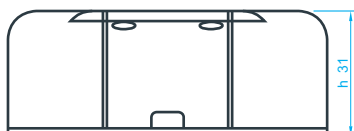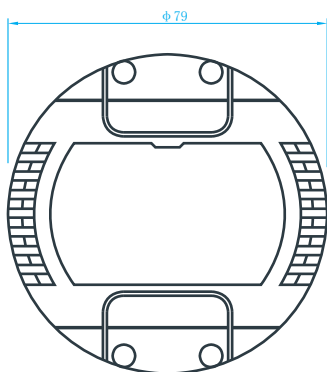

DALI调光接线图

DALI dimmer wiring diagram

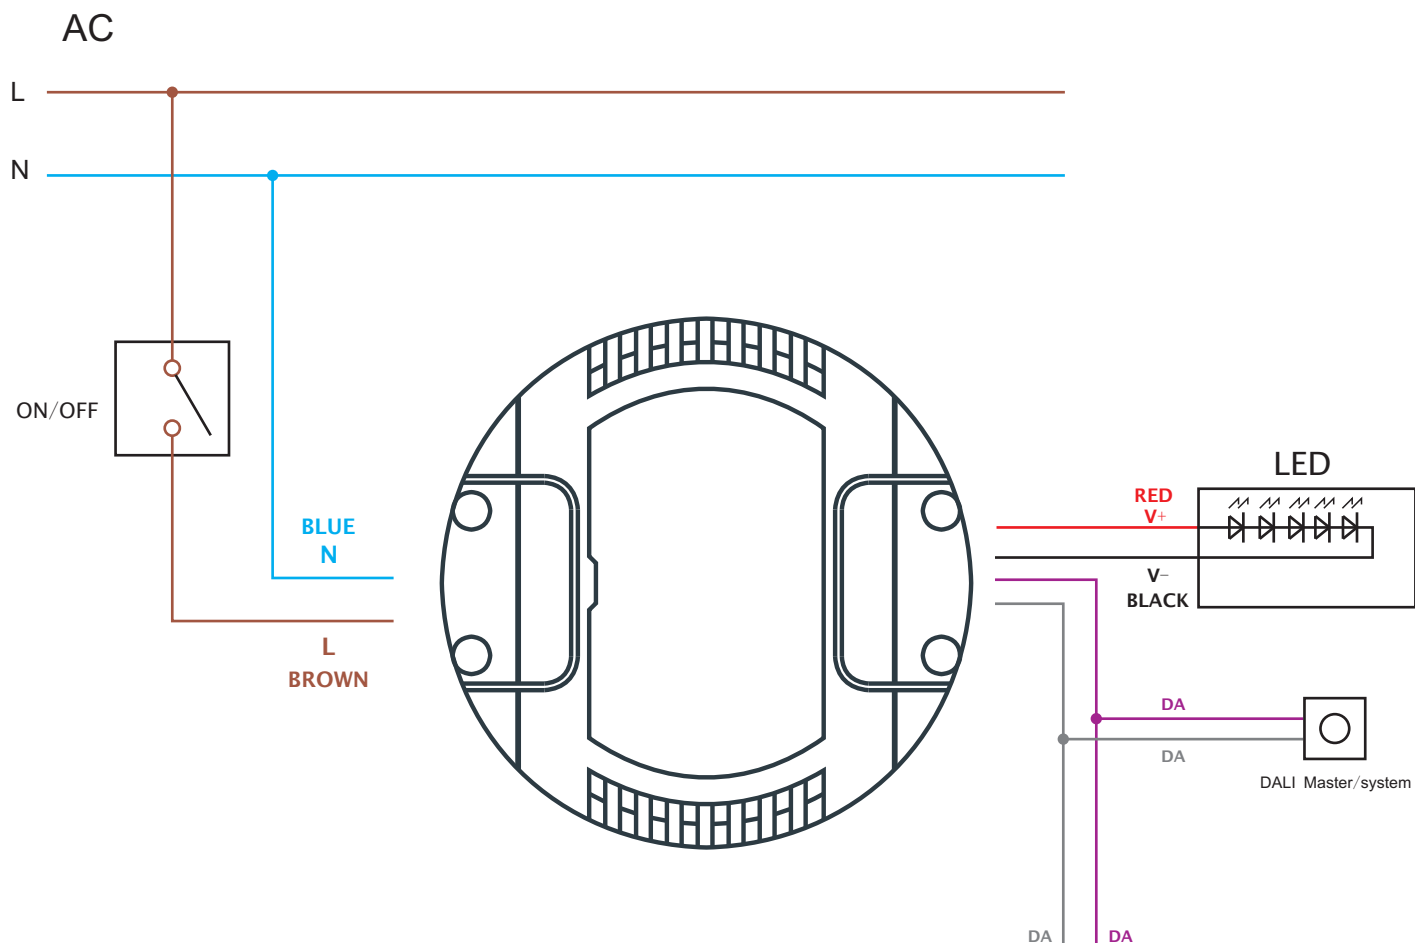

包装

Packing

